

## Mini Delay Set

## Delay Set Admixture

Fritz-Pak Mini Delayed Set is a dry powdered admixture, packaged in a ready-to-use **water soluble bag**. Mini Delayed Set is designed for stabilizing residual concrete wash water or extending the setting time of concrete while improving concrete quality. Wash water or concrete treated with the Mini Delayed Set will be stabilized and may be reused after extended time periods. Concrete produced with stabilized wash water will result in performance characteristics equal to or superior to reference concrete. Mini Delayed Set does not contain calcium chloride, nitrates, nitrites or other potentially corrosive materials and is compatible with all standard concrete admixtures.



No 95050

## MEETS STANDARDS

ASTM C-494 Type D;

AASHTO M-194; CRD C-87

## PACKAGING:

<b>SIZE</b>	8 oz. Bags
<b>BAGS/CASE</b>	60
<b>CASES/PALLET</b>	30


## ADVANTAGES

- Stabilizes concrete wash water for use in next load
- Can be used to recycle the boom in concrete pumps
- Reduces costs associated with chipping out the drum
- Improves the environmental impact of your concrete

## DOSAGE

Typically one bag of Mini Delayed Set will retard the set of one cubic yard for one hour. Double the dosage to get a 2-hour delay, triple it for three hours. See Table 1 for typical dosages. See Table to change dosage rates depending on temperature and variations in cement content of mix. More detailed information is available in the product bulletin for Standard Delayed Set.

## HOW MANY BAGS OF MINI DELAY?

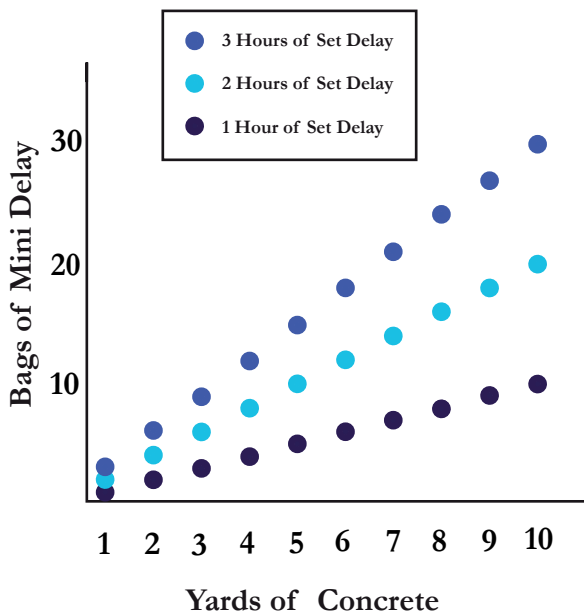

## DIRECTIONS

There are many ways to use Mini Delayed Set in concrete operations. Directions for varied applications are listed below.

### A. USE OF MINI DELAYED SET AS A CONCRETE SET RETARDER.

1. Determine how much Mini Delayed Set is needed. See Dosage section above.
2. Each 8-oz package is double bagged. Remove the protective outer bag and add the water soluble Fritz-Pak inner bag to the concrete mix. The entire inner bag will easily dissolve.
3. Agitate at high speed (15 revolutions per minute) for 5-7 minutes to insure that the Mini Delayed Set is dispersed throughout the mix. Improper mixing can lead to poor performance.

Mini Delayed Set concrete may be used with or without the addition of fresh concrete. If delayed set concrete must be used earlier than planned, mix concrete at high speed or add additional fresh concrete to compensate for the remaining set delay. If delayed set concrete must be used later than planned and concrete has not returned to its original slump, more Mini Delayed Set may be added.

### B. STABILIZATION AND REUSE OF RESIDUAL CONCRETE WASH WATER

1. After discharging all concrete, wash down rear drum fins and chutes.
2. Remove protective outer bag and add one Fritz-Pak Mini Delayed Set for each 16 hours of wash water stabilization required.
3. Add 50 to 75 gallons (200 to 300 liters) of water to the mixer.
4. Mix wash water and Mini Delayed Set at high speed for 2½ minutes.
5. Reverse drum to coat rear fin assembly. DO NOT DISCHARGE WASH WATER.
6. Mix wash water at high speed for an additional 2½ minutes (5 minutes total).
7. If the mixer drum is truck mounted, park the truck and cover the drum opening in order to prevent rain water from coming in.
8. The next time concrete is batched, subtract the added wash water and continue with normal mixing procedures.

9. Maintain a Mixer Batch Log Sheet.

### C. USE IN CONCRETE PUMPS

During concrete pumping operations there are often interruptions in the concrete supply. Mini Delayed Set can be added to the concrete in the pump hopper to allow pumps to wait.

1. To retard the concrete for one hour in small pumps with booms shorter than 42 meters use one bag of Mini Delayed Set. For larger pumps, hot weather (>90°F or 32°C) or pumps with booms painted a dark color, use two bags.
2. Remove the protective outer bag and place the inner water soluble bag into the concrete in the hopper. Turn the agitator and allow the Mini Delayed Set to mix completely for 5-7 minutes.
3. Position the boom of the pump so it can



discharge into the hopper. Start pumping to allow the retarded concrete to be circulated throughout the complete boom. Recirculate every 5-10 minutes. Check the concrete continuously and if any signs of setting occur, repeat the dosage of Mini Delayed Set or discharge the concrete.

4. Notify the contractor or concrete workers that some of the concrete will be retarded and to adjust their finishing and placing requirements if necessary.

**D. FOR USE IN STAMPED CONCRETE**

The process of stamping concrete may be slow and contractors may not have enough time to finish all the concrete properly from the initial concrete discharged to the final concrete discharged. We recommend retarding the second half of the load.

1. Discharge the first half of the concrete load normally.
2. Add 3-5 bags of Mini Delayed Set to the second half of the mix still in the drum and mix for 5-7 minutes (see Section A 1-3).
3. Place the second half of the concrete, which is now delayed.
4. Remind the contractor to keep the surface moist to avoid excessive drying of the retarded concrete.

**E. FOR USE IN DRY-BATCH PLANTS**

These batch plant facilities provide a difficult problem for the producer. During batching cement dust clings to the inner fins. This cement dust hardens rapidly, particularly in hot temperatures. We recommend that Mini Delayed Set be dissolved in water and sprayed on these surfaces to maintain a high level of inner fin cleanliness.

1. Remove the outer bag and introduce the inner water soluble bag into a sprayer container with 2-3 gallons (8-12 liters) of water.
2. Agitate for 5-7 minutes to insure that Mini Delayed Set goes into solution.
3. Apply a thin coat of solution to the rear of the drum and the discharge chute before batching the concrete. The coat of solution will be even more effective if allowed to dry, but it is not necessary.

**F. LOW SLUMP/SLIP-FORMED/SLOWLY DISCHARGED CONCRETE**

These mixes are not totally discharged for 1 to 2 hours after batching and often leave a heavy residue of mortar on the interior of the drum and fins. The use of Mini Delayed Set at the mid-point of discharge will retard the remaining concrete and reduce the heavy build-up. Also, the addition of Mini Delayed Set with 30-50 gallons of water after discharging at the site, will retard the mortar lining the inner surfaces of the drum making it easier to remove.

**G. NO CLEAN-UP DISCHARGE AT THE JOB SITE ALLOWED**

Add one bag of Mini Delayed Set to the drum together with 25-30 gallons (100-120 liters) of water. Mix for 5 minutes and then rotate the drum in reverse to coat the upper part of the drum without discharging the solution of Mini Delayed Set. Proceed to the plant or designated discharge area. At the plant it is not necessary to discharge the contents. Notify the batchman to reduce the same volume of water in the next concrete load.

**H. LEFTOVER CONCRETE IN DRUM**

When not all concrete is discharged at the job site, the leftover concrete may be retarded to allow for a safe return to the plant or re-route to another job site. Use the dosage recommended above for retarded concrete and proceed as directed by qualified quality control personnel.

**DOSAGE RATES FOR MINI DELAY**

TEMPERATURE	DOSE OF STANDARD DELAY / 100 LBS CEMENT	DOSE OF STANDARD DELAY / 1 KG CEMENT
< 60 °F (< 15 °C)	1.0 oz.	0.62 g.
60 - 80 °F (15 - 27 °C)	1.3 oz.	0.83 g.
> 60 °F (> 27 °C)	1.7 oz.	1.03 g.

## FREQUENTLY ASKED QUESTIONS

**Q.** What is the shelf life of Mini Delayed Set?

**A.** If stored properly, about 1-3 years. If the material ever seems hard or caked, do not use it. It will not break up in the mix.

**Q.** Will Mini Delayed Set affect my color?

**A.** No, it will not affect color of gray concrete. If using white concrete, use Fritz-Pak Plaster Delay Set.

**Q.** Can I re-dose?

**A.** Yes. You can add more Mini Delayed Set if the initial concrete set has not started. You may re-dose up to three times.

**Q.** What happens if I overdose the concrete?

**A.** Set time will be longer, but set will still occur.

**Q.** Will it change the strength of my concrete?

**A.** No.

**Q.** Will it react with other admixtures?

**A.** No, Mini Delayed Set is compatible with most other admixtures.

**Q.** Is it possible to mix for shorter times?

**A.** No. Mini Delayed Set needs to dissolve and be distributed evenly throughout the concrete. Short mixing times or mixing at slow speed may produce concrete with brown spots.

**Q.** The concrete already has a retarder in it; will Mini Delayed Set still work?

**A.** Yes. Mini Delayed Set is compatible with other admixtures.

**Q.** If the concrete has started to set, can I use Mini Delayed Set to stop and reverse the setting?

**A.** No. Mini Delayed Set is used to delay the initial set. If setting has already begun, Mini Delayed Set will not work.

**Q.** How do I know when setting has begun?

**A.** If you notice an increase in concrete temperature or a reduction in slump, concrete has started to set and Mini Delayed Set may not be able to stop the setting process.

**Q.** What is the difference between Mini and

Standard Delayed Set?

**A.** The chemical used is exactly the same. The only difference is the size of the bag. Mini Delayed Set is an 8 oz (1/2 lb) bag, while Standard Delayed Set is a 2 lb bag.

## COMPATIBILITY & PRECAUTIONS

Mini Delay Set is compatible with most concrete and cement admixtures. When using more than one admixture, each product should be dispensed separately. Mini Delay Set does not contain calcium chloride, nitrates, or other potentially corrosive materials. Store in a dry location, protected from breakage, deterioration, and contamination. Mini Delay Set is not subject to damage from freezing temperatures.

## WARRANTY

The information and recommendations in this publication are, to the best of our knowledge, reliable. Suggestions made concerning uses or applications are only the opinion of Fritz-Pak Corporation and users should make their own tests to determine the suitability of these products for their own particular purposes. Because of numerous factors affecting results, Fritz-Pak Corporation makes no warranty of any kind, expressed or implied, including those of merchantability and fitness for purpose. Statements herein, therefore, should not be construed as representations or warranties. The responsibility of Fritz-Pak Corporation for claims arising out of breach of warranty, negligence, strict liability, or otherwise are limited to the purchase price of the materials.

© 2023 Fritz-Pak Corporation